



(19) **United States**

(12) **Patent Application Publication**
DiGiovanni et al.

(10) **Pub. No.: US 2011/0031034 A1**

(43) **Pub. Date: Feb. 10, 2011**

(54) **POLYCRYSTALLINE COMPACTS INCLUDING IN-SITU NUCLEATED GRAINS, EARTH-BORING TOOLS INCLUDING SUCH COMPACTS, AND METHODS OF FORMING SUCH COMPACTS AND TOOLS**

(75) Inventors: **Anthony A. DiGiovanni**, Houston, TX (US); **Danny E. Scott**, Montgomery, TX (US)

Correspondence Address:
Traskbritt, P.C. / Baker Hughes, Inc.
Baker Hughes, Inc.
P.O. Box 2550
Salt Lake City, UT 84110 (US)

(73) Assignee: **BAKER HUGHES INCORPORATED**, Houston, TX (US)

(21) Appl. No.: **12/852,313**

(22) Filed: **Aug. 6, 2010**

Related U.S. Application Data

(60) Provisional application No. 61/232,265, filed on Aug. 7, 2009.


Publication Classification

(51) **Int. Cl.**
E21B 10/46 (2006.01)
B32B 5/16 (2006.01)
B32B 3/26 (2006.01)
B01J 35/02 (2006.01)
C01B 31/06 (2006.01)
B82Y 40/00 (2011.01)

(52) **U.S. Cl.** **175/428**; 428/221; 428/323; 428/312.2; 502/100; 423/446; 977/734

(57) **ABSTRACT**

Polycrystalline compacts include hard polycrystalline materials comprising in situ nucleated smaller grains of hard material interspersed and inter-bonded with larger grains of hard material. The average size of the larger grains may be at least about 250 times greater than the average size of the in situ nucleated smaller grains. Methods of forming polycrystalline compacts include nucleating and catalyzing the formation of smaller grains of hard material in the presence of larger grains of hard material, and catalyzing the formation of inter-granular bonds between the grains of hard material. For example, nucleation particles may be mixed with larger diamond grains, a carbon source, and a catalyst. The mixture may be subjected to high temperature and high pressure to form in smaller diamond grains using the nucleation particles, the carbon source, and the catalyst, and to catalyze formation of diamond-to-diamond bonds between the smaller and larger diamond grains.

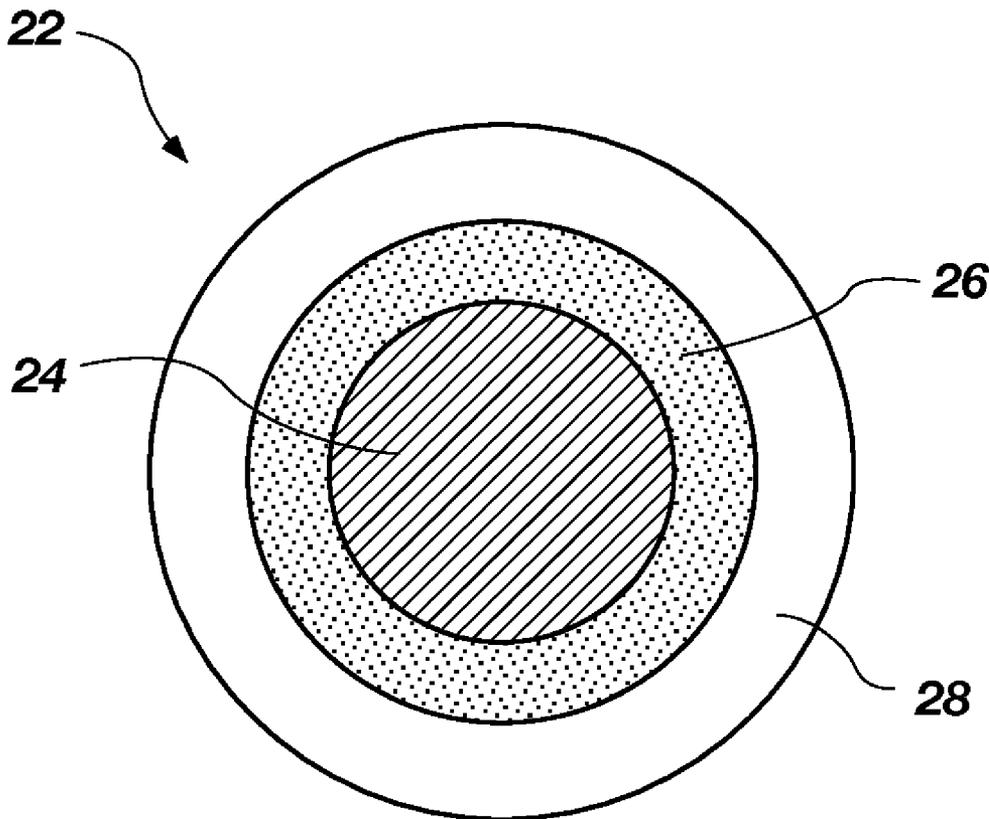

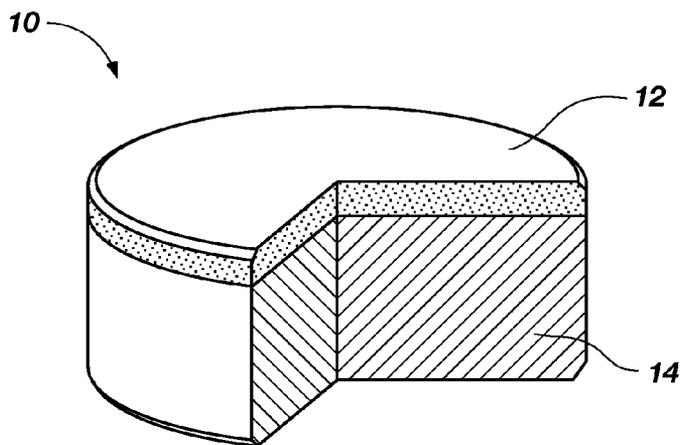


FIG. 1A

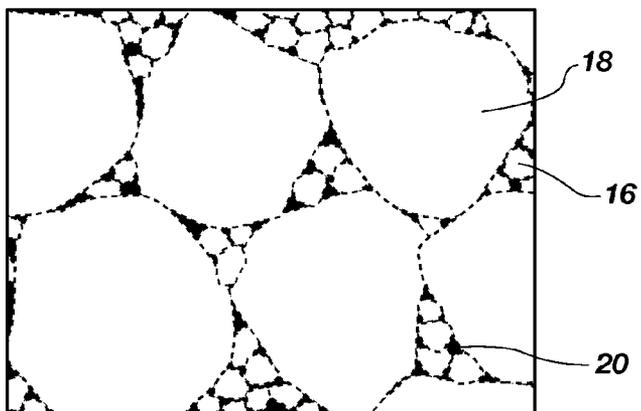


FIG. 1B

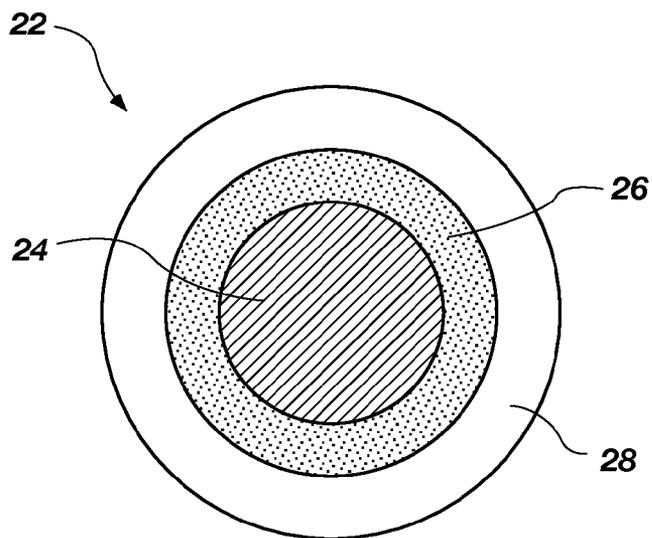


FIG. 2

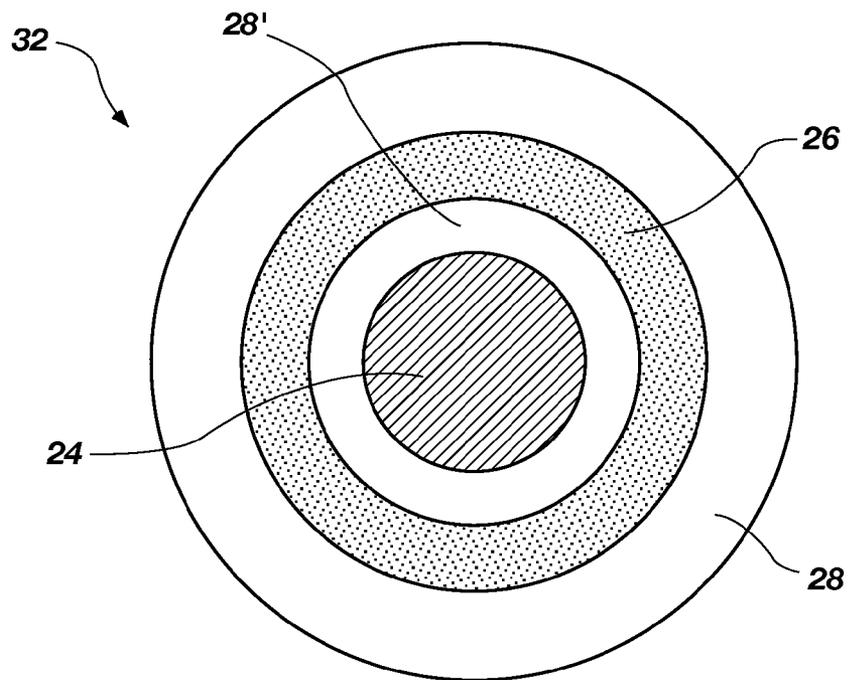


FIG. 3

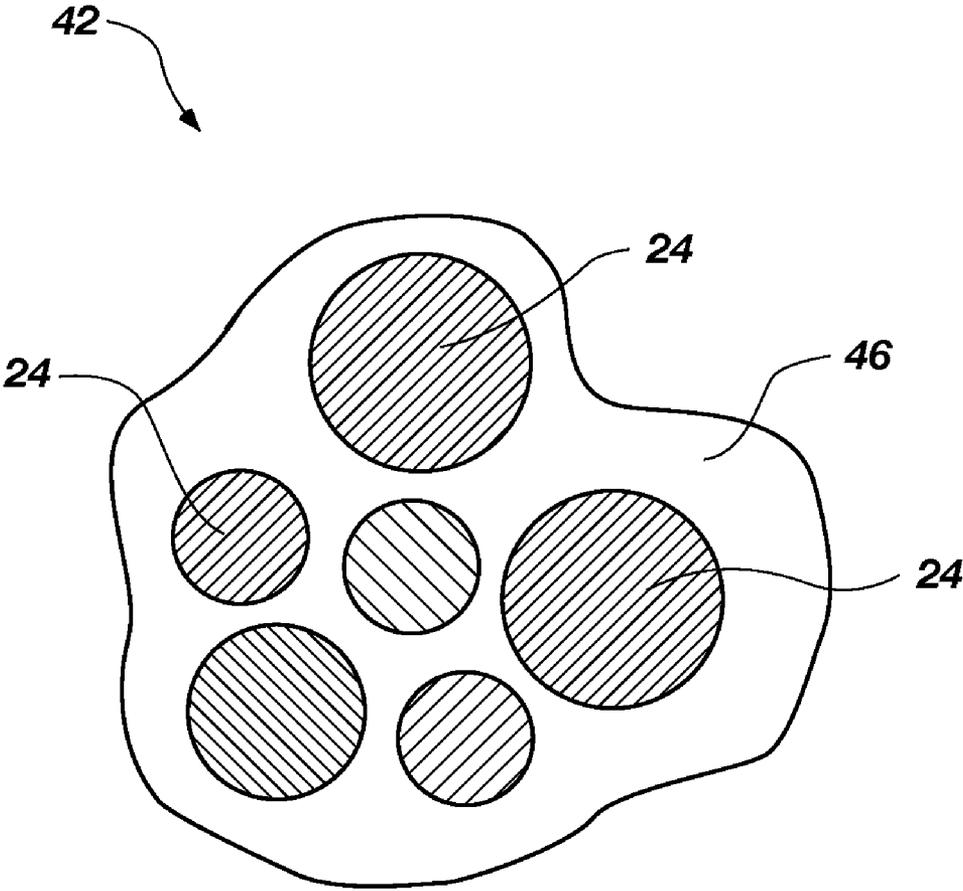


FIG. 4

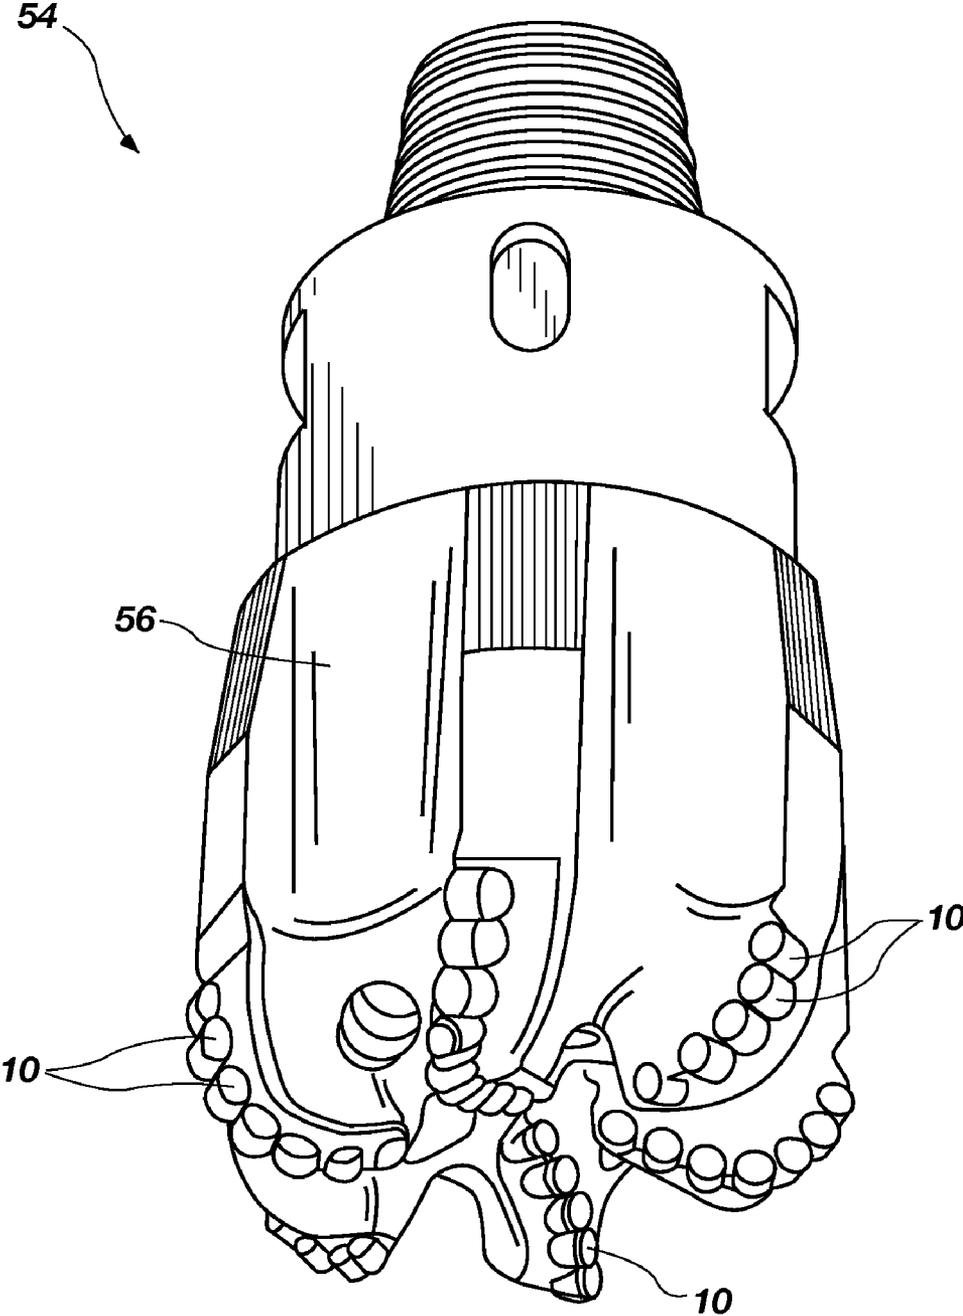


FIG. 5

**POLYCRYSTALLINE COMPACTS
INCLUDING IN-SITU NUCLEATED GRAINS,
EARTH-BORING TOOLS INCLUDING SUCH
COMPACTS, AND METHODS OF FORMING
SUCH COMPACTS AND TOOLS**

**CROSS-REFERENCE TO RELATED
APPLICATIONS**

[0001] This application claims the benefit of U.S. Provisional Patent Application Ser. No. 61/232,265 filed Aug. 7, 2009, the disclosure of which is hereby incorporated herein by this reference in its entirety.

TECHNICAL FIELD

[0002] The present invention relates generally to polycrystalline compacts, to tools including such compacts, and to methods of forming such polycrystalline compacts and tools.

BACKGROUND

[0003] Earth-boring tools for forming wellbores in subterranean earth formations generally include a plurality of cutting elements secured to a body. For example, fixed-cutter earth-boring rotary drill bits (also referred to as “drag bits”) include a plurality of cutting elements that are fixedly attached to a bit body of the drill bit. Similarly, roller cone earth-boring rotary drill bits may include cones that are mounted on bearing pins extending from legs of a bit body such that each cone is capable of rotating about the bearing pin on which it is mounted. A plurality of cutting elements may be mounted to each cone of the drill bit.

[0004] The cutting elements used in such earth-boring tools often include polycrystalline diamond compact (often referred to as “PDC”) cutting elements, which are cutting elements that include cutting faces of a polycrystalline diamond material. Polycrystalline diamond material is material that includes inter-bonded grains or crystals of diamond material. In other words, polycrystalline diamond material includes direct, inter-granular bonds between the grains or crystals of diamond material. The terms “grain” and “crystal” are used synonymously and interchangeably herein.

[0005] Polycrystalline diamond compact cutting elements are formed by sintering and bonding together relatively small diamond grains under conditions of high temperature and high pressure in the presence of a catalyst (such as, for example, cobalt, iron, nickel, or alloys and mixtures thereof) to form a layer or “table” of polycrystalline diamond material on a cutting element substrate. These processes are often referred to as high temperature/high pressure (or “HTHP”) processes. The cutting element substrate may comprise a cermet material (i.e., a ceramic-metal composite material) such as, for example, cobalt-cemented tungsten carbide. In such instances, the cobalt (or other catalyst material) in the cutting element substrate may be swept into the diamond grains during sintering and serve as the catalyst material for forming the inter-granular diamond-to-diamond bonds between, and the resulting diamond table from, the diamond grains. In other methods, powdered catalyst material may be mixed with the diamond grains prior to sintering the grains together in a HTHP process.

[0006] Upon formation of a diamond table using a HTHP process, catalyst material may remain in interstitial spaces between the grains of diamond in the resulting polycrystalline diamond table. The presence of the catalyst material in the

diamond table may contribute to thermal damage in the diamond table when the cutting element is heated during use, due to friction at the contact point between the cutting element and the formation.

[0007] Polycrystalline diamond compact cutting elements in which the catalyst material remains in the diamond table are generally thermally stable up to a temperature of about seven hundred and fifty degrees Celsius (750° C.), although internal stress within the cutting element may begin to develop at temperatures exceeding about four hundred degrees Celsius (400° C.) due to a phase change that occurs in cobalt at that temperature (a change from the “beta” phase to the “alpha” phase). Also beginning at about four hundred degrees Celsius (400° C.), there is an internal stress component that arises due to differences in the thermal expansion of the diamond grains and the catalyst metal at the grain boundaries. This difference in thermal expansion may result in relatively large tensile stresses at the interface between the diamond grains, and contributes to thermal degradation of the microstructure when polycrystalline diamond compact cutting elements are used in service. Differences in the thermal expansion between the diamond table and the cutting element substrate to which it is bonded further exacerbate the stresses in the polycrystalline diamond compact. This differential in thermal expansion may result in relatively large compressive and/or tensile stresses at the interface between the diamond table and the substrate that eventually lead to the deterioration of the diamond table, cause the diamond table to delaminate from the substrate, or result in the general ineffectiveness of the cutting element.

[0008] Furthermore, at temperatures at or above about seven hundred and fifty degrees Celsius (750° C.), some of the diamond crystals within the diamond table may react with the catalyst material causing the diamond crystals to undergo a chemical breakdown or conversion to another allotrope of carbon. For example, the diamond crystals may graphitize at the diamond crystal boundaries, which may substantially weaken the diamond table. Also, at extremely high temperatures, in addition to graphite, some of the diamond crystals may be converted to carbon monoxide and carbon dioxide.

[0009] In order to reduce the problems associated with differences in thermal expansion and chemical breakdown of the diamond crystals in polycrystalline diamond cutting elements, so-called “thermally stable” polycrystalline diamond compacts (which are also known as thermally stable products, or “TSPs”) have been developed. Such a thermally stable polycrystalline diamond compact may be formed by leaching the catalyst material (e.g., cobalt) out from interstitial spaces between the inter-bonded diamond crystals in the diamond table using, for example, an acid or combination of acids (e.g., aqua regia). A substantial amount of the catalyst material may be removed from the diamond table, or catalyst material may be removed from only a portion thereof. Thermally stable polycrystalline diamond compacts in which substantially all catalyst material has been leached out from the diamond table have been reported to be thermally stable up to temperatures of about twelve hundred degrees Celsius (1,200° C.). It has also been reported, however, that such fully leached diamond tables are relatively more brittle and vulnerable to shear, compressive, and tensile stresses than are non-leached diamond tables. In addition, it is difficult to secure a completely leached diamond table to a supporting substrate. In an effort to provide cutting elements having diamond tables that are more thermally stable relative to non-leached

diamond tables, but that are also relatively less brittle and vulnerable to shear, compressive, and tensile stresses relative to fully leached diamond tables, cutting elements have been provided that include a diamond table in which the catalyst material has been leached from a portion or portions of the diamond table. For example, it is known to leach catalyst material from the cutting face, from the side of the diamond table, or both, to a desired depth within the diamond table, but without leaching all of the catalyst material out from the diamond table.

BRIEF SUMMARY

[0010] In some embodiments, the present invention includes polycrystalline compacts that include a hard polycrystalline material comprising a plurality of in situ nucleated grains of hard material and a plurality of larger grains of hard material. The smaller grains of hard material and the larger grains of hard material are interspersed and inter-bonded to form the hard polycrystalline material.

[0011] In additional embodiments, the present invention includes methods of forming polycrystalline compacts in which smaller grains of hard material are nucleated in the presence of larger grains of hard material. The formation of the smaller grains may be catalyzed. Furthermore, the formation of inter-granular bonds between the smaller grains of hard material and the larger grains of hard material is also catalyzed.

[0012] Further embodiments of the present invention include methods of forming polycrystalline diamond compacts. A plurality of nucleation particles are mixed with a plurality of larger diamond grains, a carbon source, and a catalyst for catalyzing the formation of diamond material. The resulting mixture is subjected to a pressure greater than about five gigapascals (5.0 GPa) and a temperature greater than about one-thousand degrees Celsius (1,000° C.). Under such conditions, a plurality of smaller diamond grains are formed on the nucleation particles using the carbon source and the catalyst. The formation of diamond-to-diamond bonds between the diamond grains of the larger diamond grains and the smaller diamond grains is catalyzed, and the formation of the diamond-to-diamond bonds between the diamond grains results in the formation of a polycrystalline diamond material.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0013] While the specification concludes with claims particularly pointing out and distinctly claiming what are regarded as embodiments of the present invention, various features and advantages of embodiments of the invention may be more readily ascertained from the following description of some embodiments of the invention when read in conjunction with the accompanying drawings, in which:

[0014] FIG. 1A illustrates an embodiment of a polycrystalline compact of the present invention;

[0015] FIG. 1B is a simplified drawing showing how the polycrystalline material of FIG. 1A may appear under magnification, and illustrates inter-bonded larger and smaller grains of hard material;

[0016] FIG. 2 is a simplified drawing of a composite nucleation particle that may be used to form in situ nucleated grains

of hard material in a hard polycrystalline material like that of FIGS. 1A and 1B in accordance with embodiments of methods of the present invention;

[0017] FIG. 3 is a simplified drawing of another composite nucleation particle that may be used to form in situ nucleated grains of hard material in a hard polycrystalline material like that of FIGS. 1A and 1B in accordance with embodiments of methods of the present invention;

[0018] FIG. 4 is a simplified drawing of an embodiment of a particle cluster that may be used to form in situ nucleated grains of hard material in a hard polycrystalline material like that of FIGS. 1A and 1B in accordance with embodiments of methods of the present invention; and

[0019] FIG. 5 is a perspective view of an embodiment of a fixed-cutter earth-boring rotary drill bit that includes a plurality of polycrystalline compacts like that shown in FIGS. 1A and 1B.

DETAILED DESCRIPTION OF THE INVENTION

[0020] The illustrations presented herein are not actual views of any particular polycrystalline compact, microstructure of polycrystalline material, particles, or drill bit, and are not drawn to scale, but are merely idealized representations which are employed to describe embodiments of the invention. Additionally, elements common between figures may retain the same numerical designation.

[0021] As used herein, the term “drill bit” means and includes any type of bit or tool used for drilling during the formation or enlargement of a wellbore and includes, for example, rotary drill bits, percussion bits, core bits, eccentric bits, bicenter bits, reamers, expandable reamers, mills, drag bits, roller cone bits, hybrid bits and other drilling bits and tools known in the art.

[0022] As used herein, the term “fullerene” means and includes cage-like hollow molecules comprising a plurality of carbon atoms bonded together in a polyhedral structure. Fullerenes may include, for example, between about twenty (20) and about one hundred (100) carbon atoms. For example, C₆₀ is a fullerene having sixty (60) carbon atoms, and is a relatively common, commercially available fullerene. Other fullerenes include, for example, C₃₀, C₃₂, C₃₄, C₃₈, C₄₀, C₄₂, C₄₄, C₄₆, C₄₈, C₅₀, and C₅₂ and C₇₀.

[0023] As used herein, the term “nanoparticle” means and includes any particle having an average particle diameter of about 500 nm or less.

[0024] The term “polycrystalline material” means and includes any material comprising a plurality of grains (i.e., crystals) of the material that are bonded directly together by inter-granular bonds. The crystal structures of the individual grains of the material may be randomly oriented in space within the polycrystalline material.

[0025] As used herein, the term “inter-granular bond” means and includes any direct atomic bond (e.g., ionic, covalent, metallic, etc.) between atoms in adjacent grains of material.

[0026] As used herein, the phrase “in situ nucleated grains” means and includes grains that are nucleated and grown in place within a polycrystalline material as the polycrystalline material is formed.

[0027] As used herein, the term “diamondoid” means and includes the carbon cage molecule known as adamantane (C₁₀H₁₆), which is the smallest unit cage structure of the diamond crystal lattice, as well as variants of adamantane (e.g., molecules in which other atoms (e.g., N, O, Si, or S) are

substituted for carbon atoms in the molecule) and carbon cage polymantane molecules including between two (2) and about twenty (20) adamantane cages per molecule (e.g., diamantane, triamantane, tetramantane, pentamantane, hexamantane, heptamantane, etc.).

[0028] FIG. 1A is a simplified drawing illustrating an embodiment of a polycrystalline compact **10** of the present invention. The polycrystalline compact **10** includes a table or layer of hard polycrystalline material **12** that has been provided on (e.g., formed on or secured to) a surface of a supporting substrate **14**. In additional embodiments, the polycrystalline compact **10** may simply comprise a volume of the hard polycrystalline material **12** having any desirable shape, and may not include any supporting substrate **14**.

[0029] In some embodiments, the hard polycrystalline material **12** comprises polycrystalline diamond. In other embodiments, the hard polycrystalline material **12** may comprise another hard material such as, for example, cubic boron nitride, silicon nitride, silicon carbide, titanium carbide, tungsten carbide, tantalum carbide, or another hard material.

[0030] FIG. 1B is an enlarged view illustrating how a microstructure of the hard polycrystalline material **12** of the compact **10** may appear under magnification. As shown in FIG. 1B, the grains of the hard polycrystalline material **12** have a multi-modal (e.g., bi-modal, tri-modal, etc.) grain size distribution. In other words, the hard polycrystalline material **12** includes a first plurality of grains **16** of hard material having a first average grain size, and at least a second plurality of grains **18** of hard material having a second average grain size that differs from the first average grain size of the first plurality of grains.

[0031] The second plurality of grains **18** may be larger than the first plurality of grains **16**. While FIG. 1B illustrates the plurality of grains **18** as being larger, on average, than the first plurality of grains **16**, the drawing is not drawn to scale and has been simplified for purposes of illustration. In some embodiments, the difference between the average sizes of the first plurality of grains **16** and the second plurality of grains **18** may be greater than or less than the difference in the average grain sizes illustrated in FIG. 1B. For example, the average grain size of the larger grains **18** may be at least about one hundred and fifty (150) times greater than the average grain size of the smaller grains **16**. In some embodiments, the average grain size of the larger grains **18** may be between about two hundred and fifty (250) times and about seven hundred and fifty times (750) greater than the average grain size of the smaller grains **16**. The smaller grains **16** and the larger grains **18** may be interspersed and inter-bonded to form the hard polycrystalline material **12**. In other words, in embodiments in which the hard polycrystalline material **12** comprises polycrystalline diamond, the smaller grains **16** and the larger grains **18** may be dispersed amongst and bonded directly to one another by inter-granular diamond-to-diamond bonds.

[0032] As known in the art, the average grain size of grains within a microstructure may be determined by measuring grains of the microstructure under magnification. For example, a scanning electron microscope (SEM), a field emission scanning electron microscope (FESEM), or a transmission electron microscope (TEM) may be used to view or image a surface of a hard polycrystalline material **12** (e.g., a polished and etched surface of the hard polycrystalline material **12**). Commercially available vision systems or image analysis software are often used with such microscopy tools,

and these vision systems are capable of measuring the average grain size of grains within a microstructure.

[0033] At least some of the smaller grains **16** of the hard polycrystalline material **12** comprise in situ nucleated grains, as discussed in further detail below.

[0034] In embodiments of the present invention, the larger grains **18** may be many more times larger than the smaller grains **16**. For example, in some embodiments, and as noted above, the average grain size of the larger grains **18** may be at least about one hundred and fifty (150) times greater than the average grain size of the smaller grains **16**. In additional embodiments, the average grain size of the larger grains **18** may be at least about two hundred and fifty (250) times greater than the average grain size of the smaller grains **16**. In additional embodiments, the average grain size of the larger grains **18** may be at least about five hundred (500) times greater than the average grain size of the smaller grains **16**. In yet further embodiments, the average grain size of the larger grains **18** may be at least about seven-hundred and fifty (750) times greater than the average grain size of the smaller grains **16**.

[0035] By way of example and not limitation, the average grain size of the smaller grains **16** may be between about six nanometers (6 nm) and about one-hundred and fifty nanometers (150 nm), and the average grain size of the larger grains **18** may be between about five microns (5 μm) and about forty microns (40 μm). Thus, the smaller grains **16** may comprise nanoparticles in the microstructure of the hard polycrystalline material **12**.

[0036] The large difference in the average grain size between the smaller grains **16** and the larger grains **18** may result in smaller interstitial spaces or voids within the microstructure of the hard polycrystalline material **12** (relative to conventional polycrystalline materials), and the total volume of the interstitial spaces or voids may be more evenly distributed throughout the microstructure of the hard polycrystalline material **12**. As a result, any material that might be present within the interstitial spaces (such as, for example, a catalyst material as described below) may also be more evenly distributed throughout the microstructure of the hard polycrystalline material **12** within the relatively smaller interstitial spaces therein.

[0037] In some embodiments, the number of smaller grains **16** per unit volume of the hard polycrystalline material **12** may be higher than the number of larger grains **18** per unit volume of the hard polycrystalline material **12**.

[0038] The smaller grains **16** may comprise between about one-half of one percent (0.5%) and about thirty percent (30%) by volume of the hard polycrystalline material **12**. More specifically, the smaller grains **16** may comprise between about one-half of one percent (0.5%) and about ten percent (10%) by volume of the hard polycrystalline material **12**, or even between about one-half of one percent (0.5%) and about five percent (5%) by volume of the hard polycrystalline material **12**. The remainder of the volume of the hard polycrystalline material **12**, may be substantially comprised by the larger grains **18**. A relatively small percentage of the remainder of the volume of the hard polycrystalline material **12** (e.g., less than about ten percent (10%)) may comprise interstitial spaces between the smaller and larger grains **16**, **18**, which spaces may be at least partially filled with a catalyst or other material, as described below.

[0039] In some embodiments, the hard polycrystalline material **12** may include a catalyst material **20** (shaded black

in FIG. 1B) disposed in interstitial spaces between the smaller grains **16** and the larger grains **18**. The catalyst material **20** may comprise a catalyst material capable of forming (and used to catalyze the formation of) inter-granular bonds between the smaller grains **16** and the larger grains **18** of the hard polycrystalline material **12**. In other embodiments, however, the interstitial spaces between the smaller grains **16** and the larger grains **18** in some regions of the hard polycrystalline material **12**, or throughout the entire volume of the hard polycrystalline material **12**, may be at least substantially free of such a catalyst material **20**. In such embodiments, the interstitial spaces may comprise voids filled with gas (e.g., air), or the interstitial spaces may be filled with another material that is not a catalyst material **20** and that will not contribute to degradation of the polycrystalline material **12** when the compact **10** is used in a drilling operation.

[0040] In embodiments in which the polycrystalline material **12** comprises polycrystalline diamond, the catalyst material **20** may comprise a Group VIIIA element (e.g., iron, cobalt, or nickel) or an alloy thereof, and the catalyst material **20** may comprise between about 0.1% and about 20% by volume of the hard polycrystalline material **12**. In additional embodiments, the catalyst material **20** may comprise a carbonate material such as, for example, a carbonate of one or more of Mg, Ca, Sr, and Ba. Carbonates may also be used to catalyze the formation of polycrystalline diamond.

[0041] The hard polycrystalline material **12** of the compact **10** may be formed using a high temperature/high pressure (or "HTHP") process. Such processes, and systems for carrying out such processes, are generally known in the art. In accordance with embodiments of the present invention, however, the smaller grains **16** may be nucleated in situ during the HTHP process used to form the hard polycrystalline material **12**.

[0042] In some embodiments, the hard polycrystalline material **12** may be formed on a supporting substrate **14** (as shown in FIG. 1A) of cemented tungsten carbide or another suitable substrate material in a conventional HTHP process of the type described, by way of non-limiting example, in U.S. Pat. No. 3,745,623 to Wentorf et al. (issued Jul. 17, 1973), or may be formed as a freestanding polycrystalline compact (i.e., without the supporting substrate **14**) in a similar conventional HTHP process as described, by way of non-limiting example, in U.S. Pat. No. 5,127,923 to Bunting et al. (issued Jul. 7, 1992), the disclosure of each of which patents is incorporated herein in its entirety by this reference. In some embodiments, the catalyst material **20** may be supplied from the supporting substrate **14** during an HTHP process used to form the hard polycrystalline material **12**. For example, the substrate **14** may comprise a cobalt-cemented tungsten carbide material. The cobalt of the cobalt-cemented tungsten carbide may serve as the catalyst material **20** during the HTHP process.

[0043] To form the hard polycrystalline material **12** in an HTHP process, a particulate mixture comprising grains of hard material, as well as nucleation particles (as described in detail below) may be subjected to elevated temperatures (e.g., temperatures greater than about 1,000° C.) and elevated pressures (e.g., pressures greater than about 5.0 gigapascals (GPa)) to form inter-granular bonds between the grains, thereby forming the hard polycrystalline material **12**. In some embodiments, the particulate mixture may be sub-

jected to a pressure greater than about six gigapascals (6.0 GPa) and a temperature greater than about 1,500° C. in the HTHP process.

[0044] The time at the elevated temperatures and pressures may be relatively short when compared to conventional HTHP processes to prevent the atoms of the in situ nucleated small grains **16** from diffusing to, and being incorporated into, the larger grains **18**. For example, in some embodiments, the particulate mixture may be subjected to a pressure greater than about six and one half gigapascals (6.5 GPa) and a temperature greater than about 1,500° C. for less than about two minutes (2.0 min) during the HTHP process.

[0045] If necessary or desirable, the temperature may be reduced to about 1,000° C. and held for up to about one hour or more to assist in the nucleation of the small grains **16** in situ. Additionally, the temperature may be reduced and maintained at a temperature between about 400° C. and about 800° C. for at least about thirty (30) minutes (e.g., up to about twenty four (24) hours or more) in a process similar to those known in the art of metallurgy as "re-crystallization annealing" processes.

[0046] In embodiments in which a carbonate catalyst material **20** (e.g., a carbonate of one or more of Mg, Ca, Sr, and Ba) is used to catalyze the formation of polycrystalline diamond, the particulate mixture may be subjected to a pressure greater than about 7.7 gigapascals (7.7 GPa) and a temperature greater than about 2,000° C.

[0047] The particulate mixture may comprise the larger grains **18** previously described herein. The particulate mixture may also comprise particles of catalyst material. In some embodiments, the particulate material may comprise a powder-like substance. In other embodiments, however, the particulate material may be carried by (e.g., on or in) another material, such as a paper or film, which may be subjected to the HTHP process. During the HTHP process, additional smaller grains of hard material may nucleate and grow on the nucleation particles present in the particulate mixture. These in situ nucleated grains may comprise the smaller grains **16** of the hard polycrystalline material **12**, as previously described herein. To facilitate the in situ nucleation of the smaller grains **16**, the particulate mixture subjected to the HTHP process may further include a plurality of nucleation particles (e.g., seed particles), as well as a source material that will be used to form (i.e., incorporated into) the in situ nucleated smaller grains **16**. In embodiments in which the smaller grains **16** comprise diamond grains, for example, the source material will comprise a carbon-containing substance such as amorphous carbon or graphite.

[0048] The nucleation particles in the particulate mixture may comprise any type of particle on which grains of the hard polycrystalline material **12** will nucleate and grow during an HTHP process. In embodiments in which the hard polycrystalline material **12** includes polycrystalline diamond, the nucleation particles may comprise, for example, fullerenes, diamondoids, amorphous carbon nanoparticles, or graphite nanoparticles.

[0049] It is known that ions may be implanted into fullerene molecules, and such ion-implanted fullerenes also may be employed in embodiments of the present invention. For example, ions of metals such as, for example, cobalt, iron, or nickel may be implanted into fullerene molecules and employed as nucleation particles in accordance with embodiments of the present invention.

[0050] In some embodiments, the particulate mixture used to form the hard polycrystalline material **12** may include composite nucleation particles, each of which may include a nucleation particle and a source material that includes atoms that will ultimately be used to form an in situ nucleated grain on the nucleation particle. Such composite nucleation particles also may include a catalyst material for catalyzing the nucleation and/or growth of an in situ nucleated grain on the nucleation particle.

[0051] FIG. 2 illustrates a simplified drawing of an embodiment of a composite nucleation particle **22** that includes a core nucleation particle **24**, a layer of source material **26** at least partially coating the core nucleation particle **24**, and a layer of catalyst material **28** at least partially coating the layer of source material **26**. The core nucleation particle **24** may comprise a single seed particle or a cluster of seed particles. The catalyst material **28** comprises a material that will catalyze the nucleation and/or growth of an in situ nucleated grain (e.g., a grain of the smaller grains **16** of FIG. 1B) on the core nucleation particle **24**. Catalyst materials that catalyze the formation of inter-granular bonds between adjacent grains of material, such as the catalyst materials **20** previously described herein, may also catalyze the nucleation and/or growth of an in situ nucleated grain on the core nucleation particle **24**. Thus, in some embodiments, the catalyst material **28** may comprise any of the catalyst materials previously described herein in relation to the catalyst material **20** of FIG. 1B.

[0052] In embodiments in which the hard polycrystalline material **12** comprises polycrystalline diamond, the core nucleation particle **24** may comprise, for example, any of diamond, a diamond-like substance (e.g., diamond-like carbon), graphite, and a fullerene (e.g. C₆₀ fullerene) or a cluster of fullerenes. As a non-limiting example, the core nucleation particle **24** may comprise a diamondoid nanoparticle such as, for example, those disclosed in Dahl et al., Isolation and Structure of Higher Diamondoids, Nanometer-Sized Diamond Molecules, Science 299, 96 (2003). In additional embodiments, the core nucleation particle **24** may include any of graphite, metals, metal alloys, nitrides, borides, oxides, and carbides. For example, amorphous carbon layers formed on particles of Ni, Pt, Cu, Fe, Co, Mo, Mg, Ag, Ti, Nb, Y, and Si may facilitate diamond nucleation thereon. Further, the core nucleation particle **24** may comprise a material that does not readily form a carbide compound such as, for example, Cu or Au. In embodiments in which the hard polycrystalline material **12** comprises polycrystalline diamond, the source material **26** comprises carbon (e.g., graphite or amorphous carbon), and the catalyst material **28** may comprise a Group VIIIA element, such as iron, nickel, or cobalt, or an alloy thereof. The carbon source may include graphite or amorphous carbon.

[0053] Table 1 below lists the materials of the core nucleation particle **24**, the layer of source material **26**, and the layer of catalyst material **28** of some embodiments of composite nucleation particles **22**, as described herein with reference to FIG. 2.

TABLE 1

Core Nucleation Particle	Source Material	Catalyst Material
C ₆₀ Fullerene	Graphite	Cobalt
C ₆₀ Fullerene	Amorphous Carbon	Cobalt

TABLE 1-continued

Core Nucleation Particle	Source Material	Catalyst Material
C ₆₀ Fullerene	Amorphous Carbon	Iron
C ₆₀ Fullerene	Amorphous Carbon	Nickel
C ₇₀ Fullerene	Amorphous Carbon	Cobalt
C ₇₀ Fullerene	Amorphous Carbon	Iron
C ₇₀ Fullerene	Amorphous Carbon	Nickel
Platinum	Amorphous Carbon	Cobalt
Platinum	Graphite	Iron
Platinum	Graphite	Nickel

[0054] The core nucleation particles **24** may have an average particles size between about two nanometers (2 nm) and about one hundred nanometers (100 nm). The thickness of the layer of source material **26** and the layer of catalyst material **28** will depend upon the particular material compositions of these layers, as well as on the material composition and size of the in situ nucleated grain of hard material to be formed therewith.

[0055] The composite nucleation particles **22** may be formed by depositing, growing, or otherwise providing a layer of source material **26** on a core nucleation particle **24**, and then depositing, growing, or otherwise providing a layer of catalyst material **28** on the layer of source material **26**. The particular process used to deposit each layer will depend upon the particular material composition of that layer. Many suitable processes for depositing such layers are known in the art including, for example, physical deposition processes (e.g., sputtering, also known as physical vapor deposition (PVD), etc.) and chemical deposition processes (e.g., chemical vapor deposition (CVD), atomic layer deposition (ALD), etc.). In some embodiments, the layer of source material **26** and the layer of catalyst material **28** may be provided on the nucleation particles **22** in a fluidized bed reactor.

[0056] For example, metal particles may be coated with carbon using flame spray synthesis techniques like those described in Athanassiou et al., Nanotechnology 17 1668-1673 (2006), which is incorporated herein in its entirety by this reference. Plasma reactors also may be used to form amorphous carbon films. For example, fullerenes and other non-metallic particles may be coated by first depositing the particles onto a substrate in a thin layer. The particles may be deposited onto the substrate by, for example, suspending the particles in a fluid (e.g., a polar liquid) to form a suspension, dispersing the suspension over a surface of the substrate, and evaporating the fluid from the surface of the substrate and leaving the particles behind on the surface. The substrate with the fullerene particles thereon then may be placed into a plasma deposition chamber and coated with an amorphous carbon film using processes known in the art. The coated fullerene particles may be removed from the chamber, and if not fully coated, may be mechanically ground into a powder, re-deposited onto a substrate and re-coated, as previously described. This process may be repeated until a desirable coating has been attained on the particles.

[0057] FIG. 3 depicts another embodiment of a composite nucleation particle **32** that may be included in a particulate mixture used to form a hard polycrystalline material **12** in an HTHP process, as previously described herein. The composite nucleation particle **32** is similar to the composite nucleation particle **22** of FIG. 2, and includes an inner core nucleation particle **24**, a layer of source material **26**, and a layer of catalyst material **28**. The nucleation particle **32** of FIG. 3,

however, includes an additional layer of catalyst material **28'** disposed between the core nucleation particle **24** and the layer of source material **26**. Thus, in the embodiment of FIG. 3, the additional layer of catalyst material **28'** at least partially coats (e.g., encapsulates) the core nucleation particle **24**, the layer of source material **26** at least partially coats the additional layer of catalyst material **28'**, and the layer of catalyst material **28** at least partially coats the layer of source material **26**.

[0058] As the density of the source material **26** and the density of the resulting in situ grains formed using the source material **26** may vary, the difference in densities must be accounted for when selecting the particle size of the composite nucleation particles **22**, **32** to form resulting in situ nucleated smaller grains **16** having a selected average grain size.

[0059] FIG. 4 depicts another embodiment of a composite nucleation particle **42** that may be included in a particulate mixture used to form a hard polycrystalline material **12** in an HTHP process, as previously described herein. The composite nucleation particle **42** comprises a cluster of core nucleation particles **24**. The core nucleation particles **24** in each composite nucleation particle **42** may be substantially identical to one another, or the composite nucleation particle **42** may comprise a mixture of one or more of the different types of core nucleation particles **24** previously mentioned herein. In some embodiments, the core nucleation particles **24** may be held together in a binder material **46**, which may comprise, for example, a metal material, a polymer material, an organic material, etc. In some embodiments, the binder material **46** may comprise a source material **26**, a catalyst material **28**, or a mixture of a source material **26** and a catalyst material **28**. In other embodiments, the core nucleation particles **24** may simply be held together by inter-particle forces (e.g., van der Waals forces). The composite nucleation particle **42** also may be coated with one or more of a layer of source material **26** and a layer of catalyst material **28**, as previously described in relation to the composite nucleation particle **22** of FIG. 2 and the composite nucleation particle **32** of FIG. 3.

[0060] When composite nucleation particles **22**, **32**, **42** are added to a particulate mixture and subjected to an HTHP process as previously described, an in situ nucleated grain of hard material (e.g., diamond, cubic boron nitride, etc.) may nucleate and grow on the core nucleation particles **24** of the composite nucleation particles **22**, **32**, **42**. The atoms of the source material **26** may be used to form (and become incorporated in) the growing in situ nucleated grains of hard material. In other words, the source material **26** is consumed by the growing in situ nucleated grains of hard material. Furthermore, the nucleation and/or growth of the in situ nucleated grains of hard material may be catalyzed by the catalyst material **28**, **28'**. The parameters of the HTHP process (e.g., temperature, pressure, time, etc.) may be selectively controlled to result in the formation of in situ nucleated smaller grains **16** of hard material within the resulting hard polycrystalline material **12**. Thus, the smaller grains **16** of hard material may be nucleated and catalyzed in the presence of the larger grains **18** of hard material, and the formation of inter-granular bonds between the smaller grains **16** and the larger grains **18** of hard material may be catalyzed.

[0061] As previously mentioned, catalyst material may be used to catalyze the formation of the inter-granular bonds between the in situ nucleated smaller grains **16** and the larger grains **18** during the HTHP process, as well as to catalyze the nucleation and/or growth of the in situ nucleated smaller grains **16**. After the HTHP process, some catalyst material **20**

(e.g., cobalt) may remain in the interstitial spaces between the inter-bonded smaller grains **16** and larger grains **18**.

[0062] Optionally, such catalyst material **20** may be removed from the hard polycrystalline material **12** after the HTHP process, as known in the art. For example, a leaching process may be used to remove catalyst material **20** from interstitial spaces between the inter-bonded grains of the hard polycrystalline material **12**. By way of example and not limitation, the hard polycrystalline material **12** may be leached using a leaching agent and process such as those described more fully in, for example, U.S. Pat. No. 5,127,923 to Bunting et al. (issued Jul. 7, 1992), and U.S. Pat. No. 4,224,380 to Bovenkerk et al. (issued Sep. 23, 1980), the disclosure of each of which patent is incorporated herein in its entirety by this reference. Specifically, aqua regia (a mixture of concentrated nitric acid (HNO₃) and concentrated hydrochloric acid (HCl)) may be used to at least substantially remove catalyst material from the interstitial spaces between the inter-bonded grains in the hard polycrystalline material **12**. It is also known to use boiling hydrochloric acid (HCl) and boiling hydrofluoric acid (HF) as leaching agents. One particularly suitable leaching agent is hydrochloric acid (HCl) at a temperature above 110° C., which may be provided in contact with the hard polycrystalline material **12** for a period of about two (2) hours to about sixty (60) hours, depending upon the size of the body comprising the hard polycrystalline material **12**. After leaching the hard polycrystalline material **12**, the interstitial spaces between the inter-bonded grains within the hard polycrystalline material **12** may be at least substantially free of catalyst material used to catalyze formation of inter-granular bonds between the grains in the hard polycrystalline material **12**.

[0063] The overall polycrystalline microstructure that may be achieved in accordance with embodiments of the present invention may result in polycrystalline diamond compacts that exhibit improved durability and thermal stability.

[0064] Polycrystalline compacts that embody teachings of the present invention, such as the polycrystalline compact **10** illustrated in FIGS. 1A and 1B, may be formed and secured to drill bits for use in forming wellbores in subterranean formations. As a non-limiting example, FIG. 5 illustrates a fixed cutter type earth-boring rotary drill bit **54** that includes a plurality of polycrystalline compacts **10** as previously described herein. The rotary drill bit **54** includes a bit body **56**, and the polycrystalline compacts **10**, which serve as cutting elements, are bonded to the bit body **56**. The polycrystalline compacts **10** may be brazed (or otherwise secured) within pockets formed in the outer surface of the bit body **56**.

[0065] The foregoing description is directed to particular embodiments for the purpose of illustration and explanation. It will be apparent, however, to one skilled in the art that many modifications and changes to the embodiments set forth above are possible without departing from the scope of the embodiments disclosed herein as hereinafter claimed, including legal equivalents. It is intended that the following claims be interpreted to embrace all such modifications and changes.

1. A polycrystalline compact, comprising:
 - a hard polycrystalline material comprising:
 - a plurality of in situ nucleated smaller grains of hard material having a first average grain size; and
 - a plurality of larger grains of hard material having a second average grain size, the plurality of in situ nucleated smaller grains and the plurality of larger grains being interspersed and inter-bonded.

2. The polycrystalline compact of claim 1, wherein the second average grain size is at least about 150 times greater than the first average grain size.

3. The polycrystalline compact of claim 1, further comprising a catalyst material disposed in at least some interstitial spaces between the interspersed and inter-bonded grains of hard material.

4. The polycrystalline compact of claim 1, wherein each of the hard material of the plurality of smaller grains and the hard material of the plurality of larger grains comprises diamond.

5. The polycrystalline compact of claim 1, wherein each of the hard material of the plurality of smaller grains and the hard material of the plurality of larger grains comprises cubic boron nitride.

6. The polycrystalline compact of claim 1, wherein the plurality of smaller grains of hard material comprises between about one-half of one percent (0.5%) and about thirty percent (30%) by volume of the hard polycrystalline material.

7. The polycrystalline compact of claim 1, wherein the first average particles size is between about six nanometers (6 nm) and about one-hundred and fifty nanometers (150 nm), and the second average particle size is between about five microns (5 μm) and about forty microns (40 μm).

8. The polycrystalline compact of claim 1, further comprising at least one of molybdenum, magnesium, neodymium, and titanium disposed in at least some interstitial spaces between the interspersed and inter-bonded grains of hard material.

9. The polycrystalline compact of claim 1, further comprising a refractory metal carbide disposed in at least some interstitial spaces between the interspersed and inter-bonded grains of hard material.

10. An earth-boring tool, comprising:

a body; and

at least one polycrystalline compact attached to the body, the at least one polycrystalline compact comprising:

a hard polycrystalline material comprising:

a plurality of in situ nucleated smaller grains of hard material having a first average grain size; and

a plurality of larger grains of hard material having a second average grain size, the plurality of in situ nucleated smaller grains and the plurality of larger grains being interspersed and inter-bonded.

11. A method of forming a polycrystalline compact, comprising:

nucleating and catalyzing the formation of smaller grains of hard material in the presence of larger grains of hard material; and

catalyzing the formation of inter-granular bonds between the grains of the smaller grains of hard material and the larger grains of hard material.

12. The method of claim 11, further comprising selecting the hard material of each of the smaller grains of hard material and the larger grains of hard material to comprise cubic boron nitride.

13. The method of claim 11, further comprising selecting the hard material of each of the smaller grains of hard material and the larger grains of hard material to comprise diamond.

14. The method of claim 13, wherein the actions of nucleating and catalyzing the formation of smaller grains and catalyzing the formation of inter-granular bonds are carried out at a pressure greater than about six and one-half gigapascals (6.5 GPa) and a temperature greater than about 1,500° C.

15. The method of claim 14, wherein nucleating and catalyzing the formation of smaller grains comprises coating nucleation particles with a carbon source.

16. The method of claim 15, further comprising:

selecting the nucleation particles to comprise at least one of a metal, a carbide, a nitride, a boride, an oxide, graphite, and a fullerene; and

selecting the carbon source to comprise at least one of graphite and amorphous carbon.

17. The method of claim 16, further comprising coating the carbon source on the nucleation particles with a catalyst material comprising at least one of cobalt, iron, and nickel.

18. A method of forming a polycrystalline diamond compact, comprising:

mixing a plurality of nucleation particles with a plurality of larger diamond grains, a carbon source, and a catalyst for catalyzing the formation of diamond material;

subjecting the mixture to a pressure greater than about five gigapascals (5.0 GPa) and a temperature greater than about 1,000° C.;

forming a plurality of smaller diamond grains by catalyzing the formation of diamond material on the plurality of nucleation particles using the carbon source and the catalyst; and

catalyzing the formation of diamond-to-diamond bonds between the diamond grains of the plurality of larger diamond grains and the plurality of smaller diamond grains to form a polycrystalline diamond material.

19. The method of claim 18, further comprising selecting the nucleation particles of the plurality of nucleation particles to comprise nanoparticles of at least one of a metal, a carbide, a nitride, a boride, an oxide, graphite, and a fullerene.

20. The method of claim 18, further comprising selecting the carbon source to comprise at least one of graphite and amorphous carbon.

21. The method of claim 18, further comprising selecting the catalyst to comprise at least one of cobalt, iron, and nickel.

22. The method of claim 18, further comprising coating the nucleation particles of the plurality of nucleation particles with at least one of the carbon source and the catalyst.

23. The method of claim 22, further comprising forming a plurality of composite nucleation particles comprising:

an inner core comprising at least one nucleation particle of the plurality of nucleation particles;

an intermediate layer comprising the carbon source; and

an outer layer comprising the catalyst.

24. The method of claim 22, further comprising forming a plurality of composite nucleation particles comprising a cluster of core nucleation particles embedded within a binder material.

25. The method of claim 18, wherein subjecting the mixture to a pressure greater than about five gigapascals (5.0

GPa) and a temperature greater than about 1,000° C. comprises subjecting the mixture to a pressure greater than about six and one-half gigapascals (6.5 GPa) and a temperature greater than about 1,500° C. for less than about two minutes (2.0 min.).

26. The method of claim **18**, further comprising:
forming the plurality of smaller diamond grains to have a first average particles size; and

selecting the plurality of larger diamond grains to have a second average particle size that is at least about 150 times greater than the first average particle size.

27. The method of claim **18**, further comprising subjecting the mixture to a temperature between about 400° C. and about 800° C. for at least about thirty (30) minutes.

* * * * *